

DATASHEET

Rockfon® CleanSpace™ Pure



Sounds Beautiful

Rockfon® CleanSpace™ Pure

- Rockfon CleanSpace Pure is a long-lasting acoustic ceiling tile solution that is able to endure a variety of cleaning and disinfection methods
- Designed for sanitation, it has a smooth, deep-matt and pure white surface which has the added bonus of high light reflection properties
- Full range of dimensions and edges for complete design freedom
- High sound absorption (Class A) and highest fire safety (Class A1)
- Low particle emission: ISO Class 3 and withstands disinfection methods such as Hydrogen Peroxide Vapour (HPV), UVC and Ozone

Product Description

- Stone wool tile
- Visible side: smooth, deep-matt and super-white painted fleece
- Rear side: back fleece
- Durable painted edges

Application Areas

- Healthcare
- Education
- Leisure
- Retail

Edge detail	Module size (mm)	Weight (kg/m ²)	MS / MS easy access (mm)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*	
A24	600 x 600 x 20	2.3	50 / 100	Rockfon® System CleanSpace T24 A, E (ECR)™	36%		2.25	2.84	
	1200 x 600 x 20		50 / 100	Rockfon® System CleanSpace T24 A, E (ECR)™					
	600 x 600 x 40	4.1	50 / 200	Rockfon® System CleanSpace T24 A, E (ECR)™	39%		3.85	4.99	
	1200 x 600 x 40		50 / 200	Rockfon® System CleanSpace T24 A, E (ECR)™					
E24	600 x 600 x 20	2.8	60 / 100	Rockfon® System CleanSpace T24 A, E (ECR)™	37%		2.96	3.74	
	1200 x 600 x 20		60 / 100	Rockfon® System CleanSpace T24 A, E (ECR)™					
X	600 x 600 x 22	3.7	67 / 67	Rockfon® System T24 X™	37%		3.23	4.34	
	1200 x 600 x 22		67 / 67	Rockfon® System T24 X™					

MS - Minimum Suspension

* For full environmental impact disclosure, see our product EPDs available on rockfon.link/uk-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.




Performance



Sound absorption

α_w : up to 1.00 (Class A)

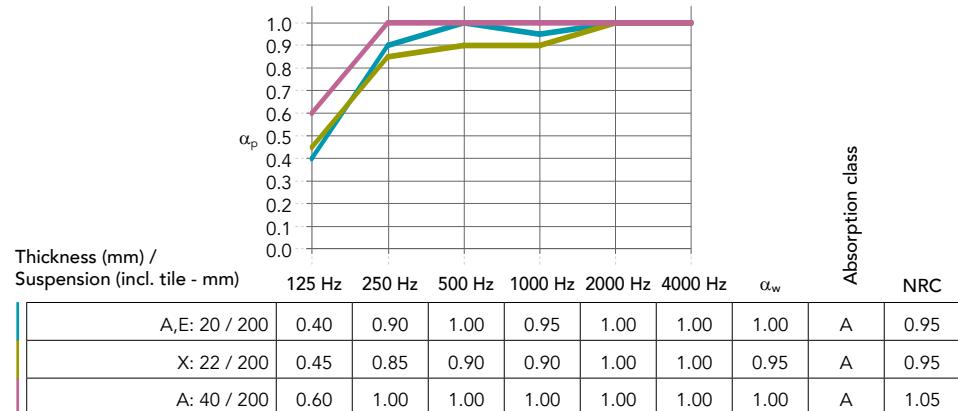

Reaction to fire

A1



Light reflection and light diffusion

86% light reflection
>99% light diffusion



Humidity and sag resistance

Up to 100% RH.
No visible deflection in high humidity
C/ON



Cleaning

- Vacuum
- Damp cloth
- High pressure cleaning (monthly and only applicable for A-edge installation). Max. 80 bar, min. 1 meter distance, water spread at 30° angle, max. water flow 360 L/h. The tiles should be clipped into the grid.
- Chemical resistance: Tested according to ISO 2812-3:2019 and classified in accordance with EN 12720. Rating on a scale from 1 to 5, where 5 is the best. We obtained 5 for the following detergents and disinfectants (weekly disinfection): Active chlorine 2.6%, quaternary ammonium 0.25%, hydrogen peroxide 5%, Ethanol 70% and Isopropanol 70%



Surface durability

Enhanced durability and dirt resistance.

Wet-scrub resistance: Class 5

The wet-scrub resistance is tested in accordance with EN ISO 11998:2007 and rated following EN 12720:2009+A1:2013 scale going from 1 to 5, where 5 is the best.



Hygiene

Stone wool provides no sustenance to microorganisms

Microbiological class M1 fulfilling the requirements of Zone 4 (very high risk) defined by NF S 90-351:2013.

Tested with:

- Methicillin resistant staphylococcus aureus (MRSA)
- Candida albicans
- Aspergillus brasiliensis
- E. Coli
- Bacillus cereus

M1 (zone 4) for the 5 tested pathogens.

The particle elimination kinetics class is conform to CP(0.5)5 according to the norm NF S 90-351:2013.



Clean Room

ISO Class 3



Disinfection

- Resistant to using Hydrogen Peroxide Vapor disinfection with impact on aeration time
- Can withstand and will not be affected by UVC and Ozone disinfection



Visual appearance

Super white surface
L value: 94.5

The whiteness (L value) of the product is tested in accordance with ISO 7724 and measured on a scale from 1 (black) to 100 (white).

Deep matt surface, perfect in critical side-light
Gloss: 0.8 gloss unit at 85° angle
The gloss of the product is tested in accordance with ISO 2813.



Diffuse ventilation

Recommended for use in combination with diffuse ventilation-, or cooling solution.



Recyclability

Fully recyclable stone wool



Indoor environment

Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health

All materials used in Rockfon products are screened against the technical checklist A20 and the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with safe fibre EU regulation and hold a EUCEB certification.

Sounds Beautiful



Wilhams Insulation Far East Sdn Bhd
15 & 17 Jalan Utarid U5/23
Mah Sing Integrated Industrial Park
40150 Shah Alam, Selangor, Malaysia
Tel : 603-7846 6728
E-mail : wilhams@wilhams.com.my
Website : www.wilhams.com.my



Part of ROCKWOOL Group / www.rockfon.co.uk