

DATASHEET

Rockfon Color-all® Special



Sounds Beautiful

Rockfon Color-all® Special



- Ceiling tiles and wall panels in a wide range of dimensions and edges available in most colours from the NCS Colour system
- Not only do you have the freedom to choose from hundreds of colours, Rockfon Color-all Special is available in exposed, semi-concealed and concealed edges and in a large variety of module sizes to allow you to create something unique for your project

Product Description

- Stone wool tile
- Visible side: smooth coloured, matt fleece
- Rear side: back fleece

Application Areas

- Industry
- Office
- Leisure
- Retail
- Education
- Healthcare

Edge detail	Module size (mm)	Weight (kg/m²)	MS / MS easy access (mm)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO ₂ eq/m²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m²)*
	600 x 600 x 20	3.4	50 / 100	Rockfon® System T15 A™	36%		3.62	4.6
	600 x 600 x 20	3.4	50 / 100	Rockfon® System T24 A™	36%		3.62	4.6
	1200 x 600 x 20		50 / 100	Rockfon® System T24 A™				
	600 x 600 x 40	6.4	50 / 100	Rockfon® System T24 A, E ECR™			6.27	8.17
	1200 x 600 x 40		50 / 100	Rockfon® System T24 A Wall™				
	1800 x 600 x 40		50 / 100	Rockfon® System T24 A, E ECR™				
	2400 x 600 x 40		50 / 100	Rockfon® System T24 A Wall™				
	1200 x 1200 x 40		50 / 100	Rockfon® System T24 A, E ECR™				
			50 / 100	Rockfon® System T24 A Wall™				
			50 / 100	Rockfon® System T24 A, E ECR™				
			50 / 100	Rockfon® System T24 A Wall™				
	1200 x 600 x 20	3.4	40 / not demountable	Rockfon® System B Adhesive™	36%		3.62	4.6
	600 x 600 x 40	6.4	40 / not demountable	Rockfon® System B Adhesive™			6.27	8.17
	1200 x 600 x 40		40 / not demountable	Rockfon® System B Adhesive™				
	600 x 600 x 20	3.4	60 / 100	Rockfon® System T24 E™	36%		3.62	4.6
	600 x 600 x 22	3.7	31 / 31	Rockfon® System T24 X™	36%		3.48	4.53

MS - Minimum Suspension

Contact us for specific dimensions, other edge types, lead times and minimum order quantities.

* For full environmental impact disclosure, see our product EPDs available on rockfon.link/uk-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.

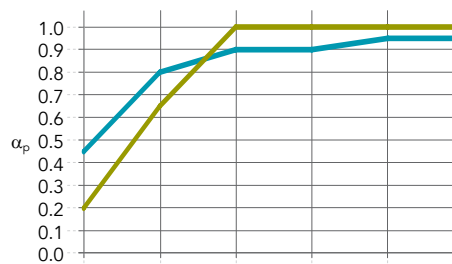


Performance



Sound absorption

α_w : up to 0,95 (Class A)



Thickness (mm) /
Suspension (incl. tile - mm)

125 Hz 250 Hz 500 Hz 1000 Hz 2000 Hz 4000 Hz

α_w

Absorption class

NRC

Thickness (mm) / Suspension (incl. tile - mm)	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Absorption class	NRC
20-40 / 200	0.45	0.80	0.90	0.90	0.95	0.95	0.95	A	0.85
40 / 40	0.20	0.65	1.00	1.00	1.00	1.00	0.95	A	0.95



Reaction to fire

A2-s1,d0



Light reflection

Colour-dependent



Humidity and sag resistance

Up to 100% RH.
No visible deflection in high humidity
C/0N



Cleaning

- Vacuum



Hygiene

Stone wool provides no sustenance to microorganisms



Thermal insulation

Thermal conductivity: $\lambda_D = 40 \text{ mW/mK}$
Thermal resistance: $R = 1.00 \text{ m}^2\text{K/W}$



Recyclability

Fully recyclable stone wool



Indoor environment

Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1).



Material Health

All materials used in Rockfon products are screened against the technical checklist A20 and the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with safe fibre EU regulation and hold a EUCEB certification.

The data presented on this datasheet covers the majority of the NCS colour selection. For detailed information on specific NCS colours please contact Rockfon Customer Services.

Rockfon production facilities are certified according to the ISO 9001 and ISO 14001 management systems standards.

Sounds Beautiful



Wilhams Insulation Far East Sdn Bhd

15 & 17 Jalan Utarid U5/23
Mah Sing Integrated Industrial Park
40150 Shah Alam, Selangor, Malaysia
Tel : 603-7846 6728
E-mail : wilhams@wilhams.com.my
Website : www.wilhams.com.my

