

DATASHEET

Rockfon Humitec® Baffle



Sounds Beautiful

Rockfon Humitec® Baffle

- Flexible free-hanging acoustic solutions, perfect for humid or harsh indoor environments or for areas that require regular cleaning
- Built to withstand humid and corrosive Class D environments
- Supplied with a robust and durable frame that protects the baffle edges from damage and ensures cleanliness
- Ideal for areas where frequent or unhindered access to services is required

Product Description

- Panel: Micro-textured white painted, water repellent fleece
- Frame: White powder coated hot galvanised steel with multi-functional clip that offers several installation options.

Application Areas

- Healthcare
- Leisure
- Industry

Edge detail	Module size (mm)	Weight (kg/unit)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
4F 	1200 x 450 x 50	3.4	Rockfon® System Humitec Baffle™	36%		4.09	5.21
	1200 x 600 x 50	4.2	Rockfon® System Humitec Baffle™				

Edge detail 4F = 4 Framed

* For full environmental impact disclosure, see our product EPDs available on rockfon.link/uk-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.




Performance



Sound absorption A_{eq} (m²/item)

C - centre distance between baffle rows,
H - suspension height: net distance between baffle
and soffit

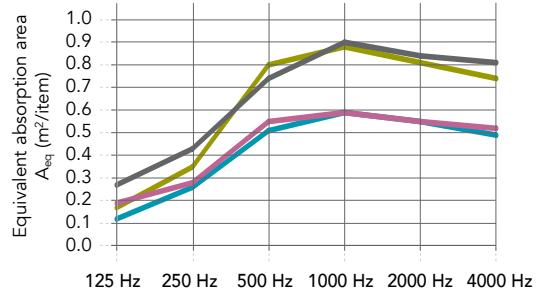

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
1200x300x50 - Baffles in rows, C300, H300	0.12	0.26	0.51	0.59	0.55	0.49
1200x600x50 (4F) - Baffles in rows, C1200, H300	0.17	0.35	0.80	0.88	0.81	0.74
1200x600x50 (4F) - Baffles in rows, C600, H40	0.19	0.28	0.55	0.59	0.55	0.52
1200x600x50 (4F) - Baffles in rows, C1200, H40	0.27	0.43	0.74	0.90	0.84	0.81



Reaction to fire A2-s1,d0



Light reflection 85%



Cleaning

- Vacuum
- Damp cloth
- Steam cleaning (twice a year)
- Low pressure foam cleaning
- High pressure cleaning: Max. 80 bar, min. 1 meter distance, water spread at a 30° angle.
- Chemical resistance: resistant to diluted solutions of ammonia, chlorine and hydrogen peroxide.



Hygiene

Stone wool provides no sustenance to microorganisms



Surface durability

Enhanced durability and dirt resistance.



Safety against failure

Class D (40°C, 95% RH)

According to EN13964:2014



Corrosion resistance Class D (EN13964)



Clean Room ISO Class 2



Recyclability

Fully recyclable stone wool



Indoor environment

Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health

All materials used in Rockfon products are screened against the technical checklist A20 and the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with safe fibre EU regulation and hold a EUCEB certification.

Sounds Beautiful



Wilhams Insulation Far East Sdn Bhd
15 & 17 Jalan Utarid U5/23
Mah Sing Integrated Industrial Park
40150 Shah Alam, Selangor, Malaysia
Tel : 603-7846 6728
E-mail : wilhams@wilhams.com.my
Website : www.wilhams.com.my



Part of ROCKWOOL Group / www.rockfon.co.uk