

DATASHEET

Rockfon® Industrial™ Black



Sounds Beautiful

Rockfon® Industrial™ Black

- Black finish which can be used in their own right to create a ceiling or be placed behind other surfaces
- Low weight (4.0kg/m²), quick and easy to install
- Highest sound absorption (Class A)

Product Description

- Stone wool tile
- Visible side: pre-finished surface
- Rear side: back fleece

Application Areas

- Industry
- Education

Edge detail	Module size (mm)	Weight (kg/m ²)	MS / MS easy access (mm)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
A24 	1200 x 600 x 50	4.0	50 / 200	Rockfon® System T24 A™	39%		3.5	4.59

MS = Minimum Suspension

* For full environmental impact disclosure, see our product EPDs available on rockfon.link/uk-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.




Performance



Sound absorption

α_w : up to 1.00 (Class A)

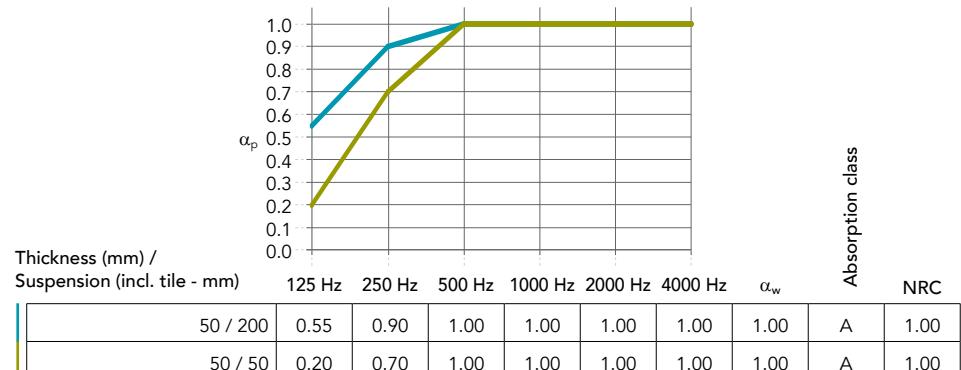

Reaction to fire

A1



Humidity and sag resistance

Up to 100% RH.

No visible deflection in high humidity
C/ON



Cleaning

- Vacuum



Hygiene

Stone wool provides no sustenance to microorganisms



Thermal insulation

Thermal conductivity:
 $\lambda_D = 37 \text{ mW/mK}$



Recyclability

Fully recyclable stone wool



Indoor environment

Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health

All materials used in Rockfon products are screened against the technical checklist A20 and the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with safe fibre EU regulation and hold a EUCEB certification.

Sounds Beautiful



Wilhams Insulation Far East Sdn Bhd
15 & 17 Jalan Utarid U5/23
Mah Sing Integrated Industrial Park
40150 Shah Alam, Selangor, Malaysia
Tel : 603-7846 6728
E-mail : wilhams@wilhams.com.my
Website : www.wilhams.com.my

