

DATASHEET

Rockfon® MediCare® Standard



Sounds Beautiful

Rockfon® MediCare® Standard





- Fulfils all standard cleaning and hygienic requirements for use in healthcare environments (compliant with HBN 10 and HTM 60)
- Does not contribute to the growth of MRSA and ensures low particle emission (ISO Class 5)
- High sound absorption and highest fire safety (Class A1)
- Standard range of tile dimensions in semi-concealed and visible grid options

Product Description

- Stone wool tile
- Visible side: micro-textured white painted fleece
- Rear side: back fleece
- Painted edges

Application Areas

- Healthcare

Edge detail	Module size (mm)	Weight (kg/m ²)	MS / MS easy access (mm)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO ₂ eq/ m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/ m ²)*
	600 x 600 x 15	2.0	50 / 100	Rockfon® System T15 A™	30%		2.31	2.78
	600 x 600 x 15 1200 x 600 x 15	2.0	50 / 100	Rockfon® System T24 A™	30%		2.31	2.78
			50 / 100	Rockfon® System MediCare T24 A, E™ (ECR)				
			50 / 100	Rockfon® System XL T24 A™				
			50 / 100	Rockfon® System MediCare T24 A, E™ (ECR)				
			50 / 100	Rockfon® System T24 A™				
	600 x 600 x 15	2.2	58 / 100	Rockfon® System T15 E™	33%		2.7	3.31
	1200 x 600 x 15		58 / 100	Rockfon® System T15 E™				
	600 x 600 x 15 1200 x 600 x 15	2.2	58 / 100	Rockfon® System T24 E™	33%		2.7	3.31
			58 / 100	Rockfon® System XL T24 E™				
			58 / 100	Rockfon® System MediCare T24 A, E™ (ECR)				
			58 / 100	Rockfon® System T24 E™				
			58 / 100	Rockfon® System MediCare T24 A, E™ (ECR)				

MS = Minimum Suspension

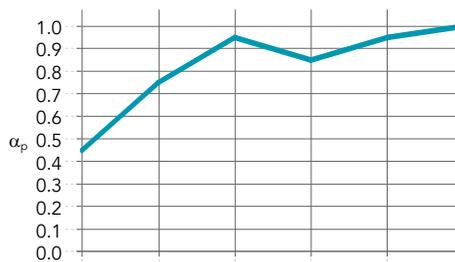
* For full environmental impact disclosure, see our product EPDs available on rockfon.link/uk-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance



Sound absorption
 α_w : 0.95 (Class A)



Edge /
 Thickness (mm) /
 Suspension (incl. tile - mm)

Edge / Thickness (mm) / Suspension (incl. tile - mm)	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Absorption class	NRC
15 / 200	0.45	0.75	0.95	0.85	0.95	1.00	0.95	A	0.90



Reaction to fire
 A1



Fire protection
 The fire resistant properties of stone wool ensure Rockfon ceiling tiles provide fire protection in construction. The fire protection properties of Rockfon ceilings have been tested and classified in accordance with European norm EN 13501-2 and/or national norms depending on requirements in national building codes. Some sizes and edge details of Rockfon MediCare Standard can be used with various Chicago Metallic grids and Rockfon systems to create a 30 minutes fire protecting ceiling in accordance with BS 476 Part 21 and Part 23. They can also be used to create a 30 minutes fire protecting membrane ceiling (integrity only) in accordance with BS 476 Part 22.



Light reflection
 86%



Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity C/0N



Cleaning
 - Vacuum
 - Damp cloth



Hygiene
 Stone wool provides no sustenance to microorganisms
 Microbiological class M1 fulfilling the requirements of Zone 4 (very high risk) defined by NF S 90-351:2013.
 Tested with:
 - Methicillin Resistant Staphylococcus Aureus (MRSA)
 - Candida Albicans
 - Aspergillus Brasiliensis



Clean Room
 ISO Class 5



Recyclability
 Fully recyclable stone wool



Indoor environment
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health
 All materials used in Rockfon products are screened against the technical checklist A20 and the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with safe fibre EU regulation and hold a EUCEB certification.

Sounds Beautiful

WILHAMS

Wilhams Insulation Far East Sdn Bhd

15 & 17 Jalan Utarid U5/23
Mah Sing Integrated Industrial Park
40150 Shah Alam, Selangor, Malaysia
Tel : 603-7846 6728

E-mail : wilhams@wilhams.com.my
Website : www.wilhams.com.my

