

DATASHEET

Rockfon® Industrial™ Opal



Sounds Beautiful

Rockfon® Industrial™ Opal

- Off white finish which can be used in their own right to create a ceiling or be placed behind other surfaces
- Low weight (4.0kg/m²), quick and easy to install
- Highest sound absorption (Class A)

Product Description

- Stone wool tile
- Visible side: pre-finished surface
- Rear side: back fleece

Application Areas

- Retail
- Industry

Edge detail	Module size (mm)	Weight (kg/m ²)	MS / MS easy access (mm)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
A24 	1200 x 600 x 50	4.0	50 / 200	Rockfon® System T24 A™	38%		3.5	4.59

MS = Minimum Suspension


* For full environmental impact disclosure, see our product EPDs available on rockfon.link/uk-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance



Sound absorption
 α_w : up to 1.00 (Class A)

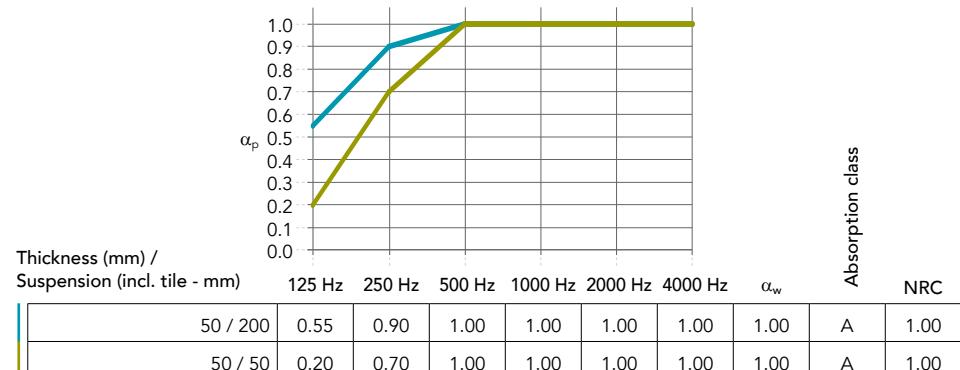

Reaction to fire
A1



Light reflection
64%



Humidity and sag resistance
Up to 100% RH.
No visible deflection in high humidity
C/ON



Cleaning
- Vacuum



Hygiene
Stone wool provides no sustenance to microorganisms



Thermal insulation
Thermal conductivity:
 $\lambda_D = 37 \text{ mW/mK}$



Recyclability
Fully recyclable stone wool



Indoor environment

Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health

All materials used in Rockfon products are screened against the technical checklist A20 and the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with safe fibre EU regulation and hold a EUCEB certification.

Sounds Beautiful



Wilhams Insulation Far East Sdn Bhd
15 & 17 Jalan Utarid U5/23
Mah Sing Integrated Industrial Park
40150 Shah Alam, Selangor, Malaysia
Tel : 603-7846 6728
E-mail : wilhams@wilhams.com.my
Website : www.wilhams.com.my

