

DATASHEET

Rockfon® Sonar® dB 35



Sounds Beautiful

Rockfon® Sonar® dB 35







- Combines room-to-room sound insulation as well as good sound absorption for a flexible office layout where confidentiality is not an issue
- Made from a 25mm stone wool core with a high performance membrane on the back which reduces the transmission of noise from room-to-room
- Basic range of dimensions in semi-concealed and visible grid options
- Light weight sound insulating tile, easy to install/cut and clean with a vacuum or damp cloth

Product Description

- Stone wool tile
- Visible side: micro-textured white painted fleece
- Rear side: high-performance membrane
- Durable painted edges

Application Areas

- Office
- Healthcare
- Education

Edge detail	Module size (mm)	Weight (kg/m ²)	MS / MS easy access (mm)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
 A24	600 x 600 x 25	3.4	50 / 100	Rockfon® System T24 A™	35%		3.75	4.73
	1200 x 600 x 25		50 / 100	Rockfon® System T24 A™				
 E15	600 x 600 x 25	3.4	60 / 100	Rockfon® System T15 E™	35%		3.75	4.73
	1200 x 600 x 25		60 / 100	Rockfon® System T15 E™				
 E24	600 x 600 x 25	3.4	60 / 100	Rockfon® System T24 E™	35%		3.75	4.73
	1200 x 600 x 25		60 / 100	Rockfon® System T24 E™				


MS = Minimum Suspension


* For full environmental impact disclosure, see our product EPDs available on rockfon.link/uk-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance

 **Sound absorption**
 α_w : 0,80 (Class B)

 **Direct sound insulation**
 R_w = 19 dB

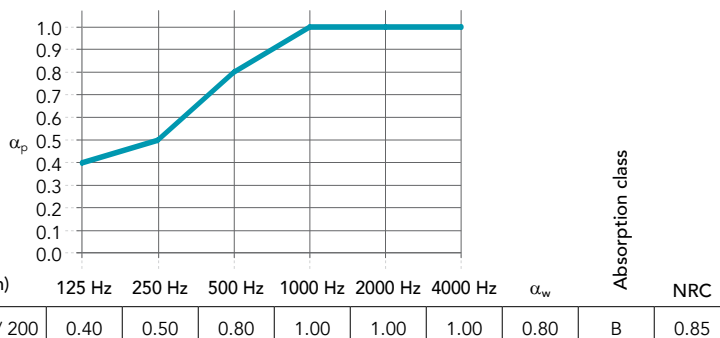
 **Room to room sound insulation**
 $D_{n,f,w}$ = 35 dB


$D_{n,f,w}$ with Rockfon Acoustimass = 45* dB


$D_{n,f,w}$ with Rockfon Soundstop 30 dB = 50* dB

The sound insulation properties (R_w , $D_{n,f,w}$) presented in the datasheet represent A-edge tiles.


*) Values obtained on the basis of theoretical analysis.




 **Reaction to fire**
 A1


 **Fire resistance**
 30-60 mins*
 *Subject to edge details, module sizes, grid and hold down clips. Contact our Technical team for more information.


 **Light reflection**
 85%


 **Humidity and sag resistance**
 Up to 100% RH.
 No visible deflection in high humidity
 C/0N

 **Cleaning**


- Vacuum
- Damp cloth
- Chemical resistance: resistant to diluted solutions of ammonia, chlorine and hydrogen peroxide.

 **Hygiene**
 Stone wool provides no sustenance to microorganisms

 **Recyclability**
 Fully recyclable stone wool

 **Indoor environment**
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



 **Material Health**
 All materials used in Rockfon products are screened against the technical checklist A20 and the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with safe fibre EU regulation and hold a EUCEB certification.

Sounds Beautiful

WILHAMS

Wilhams Insulation Far East Sdn Bhd

15 & 17 Jalan Utarid U5/23
Mah Sing Integrated Industrial Park
40150 Shah Alam, Selangor, Malaysia
Tel : 603-7846 6728

E-mail : wilhams@wilhams.com.my

Website : www.wilhams.com.my

