


Rockfon® Artic™

Datasheet



Rockfon® Artic™

- Standard surface ideal for most common applications
- Good acoustic properties
- Basic range of dimensions in semi-concealed and visible grid options
- Easy to clean with a vacuum

Product Description

- Stone wool tile
- Visible side: nuanced white painted fleece
- Rear Side: back fleece

Application Areas

- Office
- Education
- Retail

Edge detail	Module size (mm)	Approximate weight (kg/m²)	Recommended installation System
 A15	600 x 600 x 15	2,0	Chicago Metallic™ T15 4070
	1200 x 600 x 15	2,0	Chicago Metallic™ T15 4070
 A24	600 x 600 x 15	2,0	Chicago Metallic™ T24 3220
		2,0	Chicago Metallic™ T24 1812
	1200 x 600 x 15	2,0	Chicago Metallic™ T24 3220
		2,0	Chicago Metallic™ T24 1812
 E15	600 x 600 x 15	2,2	Chicago Metallic™ T15 4070
	1200 x 600 x 15	2,2	Chicago Metallic™ T15 4070
 E24	600 x 600 x 15	2,2	Chicago Metallic™ T24 3220
		2,2	Chicago Metallic™ T24 1920
	1200 x 600 x 15	2,2	Chicago Metallic™ T24 3220
		2,2	Chicago Metallic™ T24 1920




Performance



Sound absorption

α_w : 0.90 (Class A)

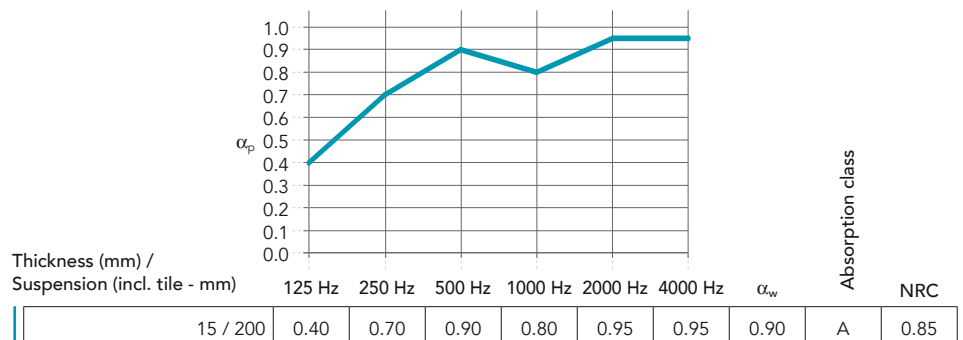

Reaction to fire

A1



Light reflection

82%



Humidity and sag resistance

Up to 100% RH.
No visible deflection in high humidity
C/ON



Cleaning

- Vacuum



Hygiene

Stone wool provides no
sustenance to microorganisms



Environment

Fully recyclable



Indoor environment

A selection of Rockfon
products have been
awarded the Finnish M1
emission classification for
building materials and the
Danish Indoor Climate Label
for low emission products



Rockfon® is a registered trademark
of the ROCKWOOL Group.

09/2019 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.



WILHAMS

Wilhams Insulation Far East Sdn Bhd

15 & 17 Jalan Utarid U5/23

Mah Sing Integrated Industrial Park

40150 Shah Alam, Selangor, Malaysia

Tel : +603-7846 6728

E-mail : wilhams@wilhams.com.my

Website : www.wilhams.com.my